

BEST AVAILABLE COPY

Patent
Attorney's Docket No. 033079-003

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

Susana Fernández Alonso et al.

Group Art Unit: 2661

Application No.: 10/025,409

Examiner: Unassigned

Filed: December 19, 2001

For: Method and Apparatus for
Presentation of Calling Subscriber
Number in Mobile Networks



I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on 4/11/2002
Date
Kathryn L. Boyd
(Typed or printed name of person signing the certificate)
Kathryn L. Boyd
(Signature of person signing the certificate)
April 1, 2002
(Date of Signature)

CLAIM FOR CONVENTION PRIORITY

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

The benefit of the filing date of the following prior foreign application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:

Spanish Patent Application No. 00128505.5

Filed: December 27, 2000

In support of this claim, enclosed is a certified copy of the prior foreign application. The prior foreign application was referred to in the oath or declaration. Acknowledgment of receipt of the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: April 1, 2002

By: Michael G. Savage
Michael G. Savage
Registration No. 32,596

P.O. Box 1404
Alexandria, Virginia 22313-1404
(919) 941-9240

THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**



Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00128505.5

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE, 19/12/01
LA HAYE, LE

THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 00128505.5

Anmeldetag:
Date of filing:
Date de dépôt: 27/12/00

Anmelder:
Applicant(s):
Demandeur(s):
TELEFONAKTIEBOLAGET L M ERICSSON (publ)
126 25 Stockholm
SWEDEN

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Method and apparatus for transmission of a calling subscriber number

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

H04Q7/38

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)



- 2 -

TITLE OF THE INVENTION
METHOD AND APPARATUS FOR PRESENTATION OF CALLING
SUBSCRIBER NUMBER IN MOBILE NETWORKS.

TECHNICAL FIELD OF THE INVENTION

5 The present invention pertains to the technical field of methods and apparatus to be used for presentation of calling subscriber number identification in mobile networks when calls pass through other intermediate networks, and particularly to the technical field of
10 methods and apparatus aimed to avoid that said calling subscriber number identification is lost due to the lack of means in said intermediate networks for transferring such identification data.

15 The present invention provides the necessary steps and means to transfer said calling subscriber number identification data through a network enabling such a transmission, like the mobile network, and by protocol means separate from the call.

BACKGROUND OF THE INVENTION

20 Most of the currently existing mobile networks make use of the Integrated Services Digital Network (hereinafter referred to as ISDN) and its corresponding ISDN User Part protocol (hereinafter abbreviated as ISUP) to switch and transfer calls, both internally within the
25 mobile network and externally to or from other networks. In this respect, particular ISDN numbers identify individual subscribers of an ISDN-based network. Moreover, some mobile networks like the Global System Mobile network (generally known and hereinafter referred to as GSM) and
30 the Universal Mobile Telecommunications System (generally known and hereinafter referred to as UMTS) identify their own subscribers by a Mobile Subscriber ISDN Number (generally known and hereinafter referred to as MSISDN).

35 Nowadays, UMTS is considered the third generation (hereinafter abbreviated as 3G) of mobile systems to which

- 3 -

the current second generation (hereinafter abbreviated as 2G) of mobile systems is converging. An appropriate example of a 2G mobile system is the above mentioned GSM. Still another example of 2G mobile systems is the Pan-American mobile system based on the Interim Standard number 41 (generally known and hereinafter referred to as IS-41). Both GSM and IS-41 based networks are evolving towards the UMTS network. Nevertheless, these and other mobile systems of different generations should still co-exist and communicate each other. Still another 3G mobile network is the Pan-American system based on Code Division Multiple Access (generally known and hereinafter referred to as CDMA2000) to which 2G Pan-American mobile systems are also evolving.

In a similar manner as UMTS and CDMA2000 inherit most of the features and services already existing in the 2G mobile systems, the latter had inherited services from ISDN. For instance, ISDN supports several Supplementary Services related to the presentation of ISDN numbers, which were already included in mobile systems like GSM or IS-41 based systems, and which will still be supported by UMTS and CDMA2000, and other systems. Examples of these ISDN supplementary Services supported also in such mobile networks are commented below:

- i) Calling Line Identification Presentation (hereinafter referred to as CLIP) is a supplementary service that provides the ability of indicating the ISDN number of the calling line, namely the calling subscriber, with possible additional sub-address information to the called party. It is also named Calling Number Identification Presentation (CNIP) under some standards.
- ii) Calling Line Identification Restriction (hereinafter referred to as CLIR) is a

- 4 -

supplementary service that precludes the presentation of the calling line identification if the calling user has an arrangement to inhibit such a presentation of his or her number to the called party.

5 iii) Connected Line Identification Presentation (hereinafter referred to as COLP) is a supplementary service that provides the ability to the calling party to present the connected party's
10 ISDN number, namely the called or connected subscriber.

 iv) Connected Line Identification Restriction (hereinafter referred to as COLR) is a
15 supplementary service offered to the called party to restrict the presentation of the connected line, namely the called subscriber or another forwarded-to number, to the calling party.

When invoking the CLIP supplementary service, the information to be transferred by ISUP to the destination
20 end side is provided by the originating end user in the SETUP message and sent as part of the basic call procedures. In the case when the calling user provides no information, the network shall provide the default number associated with the user access in the originating local
25 exchange. This calling number is transferred through the ISUP network to the destination end side and provided to the called user at call set-up.

In addition to this call-establishment related signalling through ISUP, mobile specific signalling is
30 exchanged between different mobile network entities to appropriately route the call to or from the area where the mobile subscriber is currently roaming. In this respect, the standard signalling messages and message parameters involved in said specific mobile signalling are described
35 in the Mobile Application Part (hereinafter referred to as

- 5 -

MAP) specification 29.002 v3.4.0 issued by the 3GPP Technical Specification Group Core Network (hereinafter said specification is referred to as 3GPP TS 29.002).

BRIEF DESCRIPTION OF THE DRAWINGS

5 The accompanying drawings disclose, on the one hand, embodiments of prior art and, on the other, features, objects and advantages of the present invention which will become especially apparent by reading this description in conjunction with said accompanying drawings, in which:

10 **Fig.-1-** schematically illustrates the signalling flow in a prior art scenario for call establishment mechanism in a GSM/UMTS network.

Fig.-2- schematically illustrates the signalling flow in a prior art scenario for call establishment mechanism
15 in an IS-41/CDMA2000 network.

Fig.-3- schematically illustrates the signalling flow in a prior art scenario for call establishment mechanism under intersystem roaming when an IS-41/CDMA2000 subscriber roams in a GSM/UMTS network.

20 **Fig.-4-** schematically illustrates the signalling flow in a prior art scenario for call establishment mechanism under intersystem roaming when a GSM/UMTS subscriber roams in an IS-41/CDMA2000 network.

Fig.-5- basically illustrates exemplary prior art
25 call establishment for intersystem roaming scenarios, explaining how the A-number can be lost.

Fig.-6- schematically illustrates the required signalling flow in accordance with the present invention for call establishment mechanism in a GSM/UMTS network.

30 **Fig.-7-** schematically illustrates the signalling flow in accordance with the present invention for a call establishment mechanism under intersystem roaming when an IS-41/CDMA2000 subscriber roams in a GSM/UMTS network.

Fig.-8- schematically illustrates the signalling flow
35 in accordance with the present invention for a call

- 6 -

establishment mechanism under intersystem roaming when a GSM/UMTS subscriber roams in an IS-41/CDMA2000 network.

Fig.-9- basically presents the new MAP operation "Send_Routing_Info" in terms of Operation and Parameters, to be upgraded in the recommendations 3G TS 29.002 for UMTS and the corresponding ones for GSM, in accordance with a preferred embodiment of the present invention.

Fig.-10- basically presents the new MAP operation "Provide_Roaming_Number" in terms of Operation and Parameters, to be upgraded in the recommendations 3G TS 29.002 for UMTS and the corresponding ones for GSM, in accordance with a preferred embodiment of the present invention.

PRIOR ART TO THE INVENTION

As already mentioned above, the CLIP service is also defined in mobile networks like GSM, or IS-41, or UMTS, or CDMA2000, as well as in ISDN based fixed networks, but the execution is dependent on the call delivery mechanisms.

In this respect, Fig.-1- schematically illustrates the prior art mechanism for call delivery to mobile subscribers of GSM or UMTS networks (N-100). The signalling flow in accordance with Fig.-1- is as follows:

1. The "Initial Address Message" (S-300) (hereinafter referred to as IAM message) is received in the Gateway Mobile Switching Centre (N-101) (hereinafter referred to as GMSC) of a GSM or UMTS based Public Land Mobile Network (N-100) (hereinafter referred to as PLMN). The calling subscriber number, generally known as A-number by the telecommunications community, received in said IAM is kept at the GMSC.
2. The GMSC (N-101) requests a routing number to the Home Location Register (N-102) (hereinafter referred to as HLR) by sending a "Send Routing Info" signalling message (S-120) (hereinafter referred to as SRI). At this point, and for the sake of clarity throughout the

5 more complex entity than the HLR is introduced for UMTS release 2000, currently known as the Home Subscriber Server (HSS). However, for UMTS release 99 said entity is still referred to as HLR. For the purpose of the present invention, all references are made to the HLR, as those skilled in the art will appreciate that both HLR and HSS are found to be equivalent from this perspective of the invention.

- 10 3. The HLR (N-102) then forwards such a request to the Mobile Switching Centre (N-103), in which the called subscriber is currently registered, by means of a "Provide Roaming Number" signalling message (S-130) (hereinafter referred to as PRN). This Mobile Switching
- 15 Centre (hereinafter MSC) could be a standalone MSC or collocated with a Visitor Location Register (hereinafter VLR) wherein subscriber data are stored for subscribers currently roaming in the area served by said VLR. When the MSC and the VLR are collocated, they
- 20 are represented by an entity referred to as MSC/VLR. For the purpose of the present invention, the Mobile Switching Centre is hereinafter referred to as MSC/VLR, irrespective of whether it is standalone or collocated.
- 25 4. The MSC/VLR (N-103) returns back to the HLR (N-102) the requested roaming number in the "Acknowledge to PRN" (S-140) message (hereinafter PRN ACK).
- 30 5. The HLR (N-102) then forwards to the GMSC (N-101) said roaming number as the requested routing number in the "Acknowledge to SRI" (S-150) message (hereinafter SRI ACK).
6. Then, the GMSC (N-101) continues the call establishment towards the MSC/VLR (N-103). The calling subscriber number (hereinafter referred to as A-number) is included in the IAM (S-310) ISUP message.
- 35 7. Eventually, once the A-Number digits are received with

- 8 -

the "IAM" message (S-310) in the MSC/VLR (N-103), the call is set (S-160) at the Mobile Station (N-104) (hereinafter MS) of the called subscriber. Provided that the called subscriber has the CLIP service provisioned, such an A-number is presented in the terminal.

Another mechanism for call delivery, slightly different than the one previously described for GSM or UMTS, is the one currently existing for IS-41 based systems which is also applicable for CDMA2000 based networks. Typically, the mechanism for call delivery in IS-41 or CDMA2000 based systems (N-200) is schematically illustrated in Fig.-2- wherein the signalling flow is as follows:

1. The "IAM" message (S-300) is received in the Gateway Mobile Switching Centre (N-201) (hereinafter referred to as GMSC) of a CDMA2000 or IS-41 based Public Land Mobile Network (N-200) (hereinafter referred to as PLMN). The calling subscriber number, generally known as A-number by the telecommunications community, received in said IAM is kept at the GMSC.
2. The GMSC (N-201) requests a routing number by sending a "Location Request" signalling message (S-220) (hereinafter referred to as LocReq) to the Home Location Register (N-202) (hereinafter referred to as HLR). The A-Number, namely the calling subscriber number, is included in said LocReq message.
3. The HLR (N-202) then forwards such a request to the Mobile Switching Centre (N-203), in which the called subscriber is currently registered, by means of a "Routing Request" signalling message (S-230) (hereinafter referred to as RoutReq). The A-Number is also included in said RoutReq message. This Mobile Switching Centre (hereinafter MSC) could be a standalone MSC or collocated with a Visitor Location Register

- 9 -

- (hereinafter VLR) wherein subscriber data are stored for subscribers currently roaming in the area served by said VLR. When the MSC and the VLR are collocated, they are represented by an entity referred to as MSC/VLR. For the purpose of the present invention, the Mobile Switching Centre is hereinafter referred to as MSC/VLR, irrespective of whether it is standalone or collocated, and independently of the applicable family of standards.
4. The MSC/VLR (N-203) returns back to the HLR (N-202) the requested roaming number in the "Acknowledge to RoutReq" (S-240) message (hereinafter RoutReq ACK).
5. The HLR (N-202) then forwards to the GMSC (N-201) said roaming number as the requested routing number in the "Acknowledge to LocReq" (S-250) message (hereinafter LocReq ACK).
6. Then, the GMSC (N-201) continues the call establishment towards the MSC/VLR (N-203). The calling subscriber number, namely the A-number, is included in the IAM (S-310) ISUP message.
7. Eventually, once the A-Number digits are received with the IAM message (S-310) in the MSC/VLR (N-203), the call is set (S-260) at the Mobile Station (N-204) (hereinafter MS) of the called subscriber. Provided that the called subscriber has the CNIP service provisioned, such an A-number is presented in the terminal.

Naturally, these two families of mobile networks above (GSM/UMTS, and CDMA2000/IS-41) as well as other networks based on comparable and compatible systems have to co-exist and communicate with each other. Nowadays, well-known and different inter-working functions provide the means for inter-system roaming of subscribers between these and others of such network families. In this respect, an inter-working function is nowadays logically placed between a first network like GSM and a second

-10-

network like IS-41 to allow GSM mobile subscribers to roam into an IS-41 network and viceversa. To this end, subscribers of a first network should not only be registered into their own HLR, but also be registered into the corresponding Inter-Working Function (hereinafter referred to as IWF). Said IWF acts as a VLR from a Home PLMN perspective, and acts as an HLR from the Visited PLMN perspective. Moreover, said IWF is in charge of mapping protocol operations as well as subscriber data.

10

As an example, Fig.-3- schematically shows the signalling flow when a subscriber of an IS-41/CDMA2000 system based network (N-200) roams into a GSM/UMTS system based network (N-100). In accordance with Fig.-3-, the signalling flow is as follows:

15

1. The "IAM" message (S-300) is received in the GMSC (N-201) of a CDMA2000 or IS-41 based PLMN (N-200). The calling subscriber number (A-number) received in said IAM is kept at the GMSC.
- 20 2. The GMSC (N-201) requests a routing number by sending a "LocReq" signalling message (S-220) to the HLR (N-202). The A-Number is included in said LocReq message.
3. The HLR (N-202) forwards such a request to the Inter-Working Function (N-300) (hereinafter referred to as IWF), in which the called subscriber is also registered, by means of a "RoutReq" signalling message (S-230). The A-Number is also included in said RoutReq message.
- 25 4. The IWF (N-300) then forwards such a request to the MSC/VLR (N-103) of a GSM or UMTS based network, in which the called subscriber is currently registered, by means of a "PRN" signalling message (S-130). The A-number is disregarded by said IWF.
- 30 5. The MSC/VLR (N-103) returns back to the IWF (N-300) the requested roaming number in the "PRN ACK" (S-140) message.
- 35

-11-

6. The IWF (N-300) then returns back to the HLR (N-202) the requested roaming number in the "RoutReq ACK" (S-240) message.
7. The HLR (N-202) then forwards to the GMSC (N-201) said roaming number as the requested routing number in the "LocReq ACK" (S-250) message.
8. Then, the GMSC (N-201) continues the call establishment towards the MSC/VLR (N-103). The A-number is included in the IAM (S-310) ISUP message.
9. Eventually, once the A-Number digits are received with the IAM message (S-310) in the MSC/VLR (N-103), the call is set (S-160) at the Mobile Station (N-204) of the called subscriber. Provided that the called subscriber has the CNIP service provisioned, such an A-number is presented in the terminal.

Still another example of the performance of prior art systems is schematically illustrated in Fig.-4- wherein a subscriber of a GSM/UMTS system based network (N-100) roams into an IS-41/CDMA2000 system based network (N-200). In accordance with Fig.-4-, the signalling flow is as follows:

1. The "IAM" message (S-300) is received in the GMSC (N-101) of a GSM or UMTS based PLMN (N-100). The calling subscriber number (A-number) received in said IAM is kept at the GMSC.
2. The GMSC (N-101) requests a routing number by sending an "SRI" signalling message (S-120) to the HLR (N-102).
3. The HLR (N-102) forwards such a request to the Inter-Working Function (N-300) (hereinafter referred to as IWF), in which the called subscriber is also registered, by means of a "PRN" signalling message (S-130).
4. The IWF (N-300) then forwards such a request to the MSC/VLR (N-203) of an IS-41 or CDMA2000 based network, in which the called subscriber is currently registered,

-12-

by means of a "RoutReq" signalling message (S-235). The A-number is not submitted by said IWF given that said data was not received in the "PRN" message.

- 5 5. The MSC/VLR (N-203) returns back to the IWF (N-300) the requested roaming number in the "RoutReq ACK" (S-240) message.
6. The IWF (N-300) then returns back to the HLR (N-102) the requested roaming number in the "PRN ACK" (S-140) message.
- 10 7. The HLR (N-102) then forwards to the GMSC (N-101) said roaming number as the requested routing number in the "SRI ACK" (S-150) message.
8. Then, the GMSC (N-101) continues the call establishment towards the MSC/VLR (N-203). The A-number is included in the "IAM" (S-310) ISUP message.
- 15 9. Eventually, once the A-Number digits are received with the "IAM" message (S-310) in the MSC/VLR (N-203), the call is set (S-260) at the Mobile Station (N-104) of the called subscriber. Provided that the called subscriber has the CLIP service provisioned, such an A-number is presented in the terminal.
- 20

Typically, the Calling Line Identification services (also known as Calling Number Identification services in Pan-American standards, and abbreviated as CNIP) are popular and common services which people have become familiar to.

The fact that calling subscriber number cannot be presented to the called subscriber under certain roaming conditions may be perceived by the user as an anomalous network behaviour. In this respect, there are operators such as Japan Telecom with high rates of roaming subscribers (either visitor subscribers into its own network or own subscribers roaming into other operator networks).

-13-

It is worth highlighting that, for example in North America, the called party may pay for the call and, as a direct consequence, it is very important for the called subscriber to know the number of the calling entity.

5 North-American operators, without having been given any appropriate solution yet, have boosted the needs for ensuring the reception of calling subscriber numbers at the called mobile subscriber side in any circumstance. This service exists in both network families, namely

10 GSM/UMTS and IS-41/CDMA2000, and therefore the IWF will provide the mapping between the GSM/UMTS CLIP and the IS-41/CDMA2000 CNIP. However, this conversion is not enough in order to guarantee the A-Number presentation service in the visited network. Such a number presentation related

15 service is nowadays rather dependent on the fix network capabilities (e.g. TUP/ISUP connections) than on the mobile network. At present, the ISDN exchanges support the A-number transmission though, under certain circumstances, said A-number could be lost. Typically, there are transit

20 exchanges and some international exchanges that do not perform the transmission of the A-number, especially when behaving as transit networks. This assumption may be justified on the fact that no individual subscriber charging applies, but rather network accounting principles

25 wherein the originating network pays the transit network and charges the originating own subscriber. Under this assumption, the transit network does not need the A-number and can, consequently, disregard such an A-number. Nevertheless, ISUP is always supposed to support the

30 transmission of the A-number.

When the subscriber of a GSM/UMTS network has provision for CLIP service, said subscriber receives the A-number only through ISUP signalling, whereas such an A-number is not sent via the corresponding GSM MAP message. However,

35 when the subscriber of an IS-41 based network has

-14-

provision for CNIP service, said subscriber receives the A-number via the corresponding IS-41 MAP messages, what makes the IS-41 protocol independent from the transit network capabilities (e.g. connection between IS-41 GMSC and IS-41 MSC/VLR).

On the other hand, there are still many exchanges that only inter-work through Channel Associated Signalling trunks (hereinafter referred to as CAS). Moreover, there are still many exchanges that only support Multi-Frequency signalling (hereinafter referred to as MF) like R2 based signalling system. Neither CAS nor MF based signalling support the transmission of A-number between exchanges, and this is an important drawback for some scenarios related to mobile communications. For example, when the scenarios imply international roaming or intersystem roaming, the probability of the connection between GMSC and MSC/VLR going through one of such exchanges only supporting CAS or MF increase considerably. Furthermore, the probability of not transmitting the A-number from said exchanges is also considerably high.

For an intersystem roaming scenario, since the switches involved at call establishment belong to different systems, a complete ISUP connection between them cannot be guaranteed, and therefore the A-Number presentation cannot be ensured. An explanatory call establishment for an intersystem roaming scenario is basically illustrated in Fig.-5- wherein specific roaming cases are pointed out, explaining how the A-number can be lost.

A first roaming case illustrated in Fig.-5- assumes a GSM/UMTS subscriber roaming into an IS-41 network. The call and signalling flow in accordance to Fig.-5- is as follows:

1. An "IAM" message (S-300) is received at a GSM/UMTS GMSC (N-101) from an ISUP or advanced TUP network (N-400)

-15-

- able to transmit the A-number.
2. The GSM/UMTS GMSC (N-101) sends the GSM/UMTS MAP message "Send Routing Information" (S-120) to the GSM/UMTS HLR (N-102). This message does not carry the A-Number.
 - 5 3. The GSM/UMTS HLR (N-102) sends the GSM/UMTS MAP operation "Provide Roaming Number" (S-130) to the IWF (N-300). This message does not carry the A-Number.
 4. The IWF (N-300) sends the IS-41 MAP operation "Routing Request" (S-235) to the IS-41 MSC/VLR (N-203) asking for the routing number. Since the A-Number was not received from the GSM/UMTS Network, the IWF will not provide this number towards the IS-41 Network.
 - 10 5. Once the requested data to route the call are returned by the corresponding protocol means to the GSM/UMTS GMSC (N-101), the call is then established. The GSM/UMTS GMSC (N-101) will send the A-Number in an "IAM" message (S-315) through the ISUP interface to the IS-41 MSC/VLR (N-203). However, said A-number will be lost if there is any CAS or MF system based exchange in the likely used
 - 15 Transit Network (N-500) between both mobile system networks.
 - 20

Another roaming case also illustrated in Fig.-5- assumes an IS-41 subscriber roaming into a GSM/UMTS network. The call and signalling flow in accordance to Fig.-5- is as follows:

1. An "IAM" message (S-300) is received at the IS-41 GMSC (N-201) from an ISUP or advanced TUP network (N-400) able to transmit the A-number.
- 30 2. The IS-41 GMSC (N-201) sends the IS-41 MAP message "Location Request" (S-220) to the IS-41 HLR (N-202). Said message carries the A-Number.
3. The IS-41 HLR (N-202) sends the IS-41 MAP message "Routing Request" (S-230) to the IWF (N-300). Said
- 35 message carries the A-Number received in the previous

-16-

message.

4. The IWF (N-300) sends the GSM/UMTS MAP operation "Provide Roaming Number" (S-130) to the GSM/UMTS MSC/VLR (N-103) asking for the routing number. Said A-Number was received from the IS-41 network, but the IWF (N-300) will not provide this number towards the GSM/UMTS network since the corresponding GSM/UMTS MAP messages are not prepared for that purpose.
5. Once the requested data to route the call are returned by the corresponding protocol means to the IS-41 GMSC (N-201), the call is then established. The IS-41 GMSC (N-201) will send the A-Number in an IAM message (S-315) through the ISUP interface towards the GSM/UMTS MSC/VLR (N-103). However, said A-number will be lost as in previous roaming case if there is any CAS or MF system based exchange in the likely used Transit Network (N-500) between both mobile system networks.

As already explained herein before, the main drawback behind a full support of calling line or calling number presentation in some mobile networks derives from the capabilities of fixed networks acting as transit networks between co-operating mobile systems.

DESCRIPTION OF THE INVENTION

The present invention is intended to overcome the aforementioned and other drawbacks of prior art by means of the features of which will be generally described hereinafter.

Thus, on the one hand, the present invention relates to a method for transmission of a calling subscriber number received at a Gateway Mobile Switching Centre (GMSC) of a home Public Land Mobile Network (PLMN) along with an incoming call towards a destination subscriber who is roaming subscriber in a visited Public Land Mobile Network, said destination subscriber being one of a called

-17-

subscriber and a forwarded-to subscriber, the method comprising

at least one step of interrogating at least one entity selected from GSM network entities, UMTS network entities and Inter-Working Functions by means of at least one interrogating operation selected from GSM MAP operations, UMTS MAP operations and combinations thereof, in order to retrieve a routing number, and to further reach said roaming subscriber and set up the call;

10 wherein

the step of interrogating at least one of GSM network entities, UMTS network entities and Inter-Working Functions by means of said interrogating GSM/UMTS MAP operations includes the steps of:

15 extracting the previously received calling subscriber number identification, to be further sent in an interrogating GSM/UMTS operation, at the interrogating network entity;

including said calling subscriber number identification in the interrogating GSM/UMTS MAP operation at the interrogating network entity; and

20 forwarding said interrogation and said calling subscriber number identification with the interrogating GSM/UMTS MAP operation to said at least one interrogated entity.

25 In accordance with the method of the invention the interrogating GSM/UMTS MAP operation for retrieving the routing number as well as to submit the calling subscriber number identification can be a MAP operation: "Send Routing Information" and/or a MAP operation: "Provide Roaming Number".

30 The method of the present invention is applicable, for instance, when the home PLMN is one of a GSM network and a UMTS network comprising a home GMSC, and the visited PLMN where the home subscriber is roaming, is neither a

-18-

GSM nor a UMTS network. In this case, the home GMSC may interrogate a GSM/UMTS HLR by means of a MAP operation: "Send Routing Information" that comprises the calling subscriber number identification data. In this case, the
 5 GSM/UMTS HLR interrogates an Inter-Working Function used in intersystem roaming by means of a MAP operation: "Provide Roaming Number" that also comprises the calling subscriber number identification data.

The method of the present invention is also
 10 applicable where the visited PLMN where the home subscriber is roaming, is one of a GSM network and a UMTS network, and the home PLMN is neither a GSM nor a UMTS network. In this case, an Inter-Working Function used in intersystem roaming may interrogate a visited MSC/VLR by
 15 means of a MAP operation: "Provide Roaming Number" that comprises the calling subscriber number identification data. The GSM and UMTS MSC/VLR may store on a per subscriber and per call basis, the calling subscriber number identification received in a MAP operation:
 20 "Provide Roaming Number", in order to be further delivered to the destination subscriber.

The method of the present invention is also
 applicable where the home PLMN is one of a GSM network and
 a UMTS network comprising a home GMSC, and the visited
 25 PLMN where the home subscriber is roaming, is also one of a GSM network and a UMTS network. In this case, the home GMSC may interrogate a GSM/UMTS HLR by means of a MAP operation: "Send Routing Information" that comprises the calling subscriber number identification data, and the
 30 GSM/UMTS HLR may interrogate the MSC/VLR where the subscriber is roaming by means of a MAP operation: "Provide Roaming Number" that also comprises the calling subscriber number identification data. Also in this case, any of GSM and UMTS MSC/VLR may store on a per subscriber
 35 and per call basis, the calling subscriber number

-19-

identification received in a MAP operation: "Provide Roaming Number", in order to be further delivered to the destination subscriber.

5 According to the method of the invention, the calling subscriber number identification may be included as a new parameter of specific type in said MAP operation: "Send Routing Information" and/or in an Extension Container field of said MAP operation: "Send Routing Information" instead of a new parameter of specific type.

10 Also, the calling subscriber number identification may be included as a new parameter of specific type in said MAP operation: "Provide Roaming Number" and/or in an Extension Container field of said MAP operation: "Provide Roaming Number" instead of a new parameter of specific type.

15 The present invention also refers to an apparatus for transmission of a calling subscriber number identification received at a home Public Land Mobile Network (PLMN) or at an Inter-Working Function (IWF), the apparatus comprising first means for interrogating at

20 least one entity selected from GSM network entities, UMTS network entities and Inter-Working Functions, by means of at least one interrogating operation selected from GSM MAP operations, UMTS MAP operations and combinations thereof, in order to retrieve a routing number, and to further

25 reach a destination subscriber who is a roaming subscriber roaming in a visited Public Land Mobile Network, and set up the call, wherein the apparatus further comprises

second means for extracting said calling subscriber number identification from a previously received

30 signalling message and to be further sent in an interrogating operation selected from GSM MAP operations, UMTS MAP operations and combinations thereof; and

third means for including said calling subscriber number identification obtained by said second means, in

35 the interrogating GSM/UMTS MAP operation in order to

-20-

retrieve a routing number, and to further reach such a roaming subscriber and to set up the call, presenting said calling subscriber number identification.

5 In an embodiment of the invention, the apparatus comprises means for storing on a per subscriber and per call basis, at any of GSM or UMTS entity, said calling subscriber number identification received in an interrogating GSM/UMTS MAP operation, in order to be further delivered to the destination subscriber.

10 The interrogating GSM/UMTS MAP operation may be a MAP operation: "Send Routing Information", said MAP operation being designed for including said calling subscriber number identification. The interrogating GSM/UMTS MAP operation may also be a MAP operation: "Provide Roaming
15 Number" said MAP operation also being designed for including said calling subscriber number identification.

The apparatus is applicable to systems wherein the home PLMN is one of a GSM network and a UMTS network comprising a home GMSC, and the visited PLMN, where the
20 home subscriber is roaming, is neither a GSM nor a UMTS network, in which case home GMSC interrogates a GSM/UMTS HLR by means of a MAP operation: "Send Routing Information" that comprises the calling subscriber number identification data, whilst the GSM/UMTS HLR interrogates
25 an Inter-Working Function used in intersystem roaming by means of a MAP operation: "Provide Roaming Number" that also comprises the calling subscriber number identification data.

The apparatus of the invention is also applicable to
30 systems wherein the visited PLMN where the home subscriber is roaming, is one of a GSM network and a UMTS network, and the home PLMN is neither a GSM nor a UMTS network, in which case an Inter-Working Function used in intersystem roaming interrogates a visited MSC/VLR by means of a MAP
35 operation: "Provide Roaming Number" that comprises the

-21-

calling subscriber number identification data.

The apparatus of the invention is furthermore applicable to systems wherein the home PLMN is one of a GSM network and a UMTS network comprising a home GMSC, and the visited PLMN where the home subscriber is roaming, is also one of a GSM network and a UMTS network. In this case the home GMSC interrogates a GSM/UMTS HLR by means of a MAP operation: "Send Routing Information" that comprises the calling subscriber number identification data, whilst the GSM/UMTS HLR interrogates the MSC/VLR where the home subscriber is roaming, by means of a MAP operation: "Provide Roaming Number" that also comprises the calling subscriber number identification data.

In the apparatus of the invention, the calling subscriber number identification may be included as a new parameter of specific type in said MAP operation: "Send Routing Information", or in an Extension Container field of said MAP operation: "Send Routing Information"; instead of a new parameter of specific type.

Alternatively or complementarily, the calling subscriber number identification may be included as a new parameter of specific type in said MAP operation: "Provide Roaming Number", or in an Extension Container field of said MAP operation: "Provide Roaming Number"; instead of a new parameter of specific type.

DESCRIPTION OF EMBODIMENTS OF THE INVENTION

So as to provide further information on aspects, features and advantages, embodiments of the present invention will hereafter be described with reference to the accompanying drawings.

In accordance with an aspect of the present invention, a preferred embodiment refers to a new method and apparatus to achieve the call establishment with presentation of the calling subscriber number for a destination mobile subscriber in an intersystem roaming

-22-

scenario. This preferred embodiment provides the means and method in such a manner that the A-Number is received in the visited network via MAP signalling. This way the A-Number transmission is independent from the signalling network. An exemplary call establishment for an intersystem roaming scenario is basically illustrated in Fig.-6- to Fig.-8-, wherein specific roaming cases are pointed out, explaining how the A-number reaches the visited network via MAP signalling in order to be further presented to the destination subscriber.

A first roaming case illustrated in Fig.-8- assumes a GSM/UMTS subscriber roaming into an IS-41 network. The call and signalling flow in accordance to Fig.-8- is as follows:

1. An "IAM" message (S-300) is received at a GSM/UMTS GMSC (N-101) from an ISUP or advanced TUP network able to transmit the A-number.
2. The GSM/UMTS GMSC (N-101) sends the GSM/UMTS MAP message "Send Routing Information" (S-175) to the GSM/UMTS HLR (N-102). In accordance to this preferred embodiment said MAP message comprises now the A-Number, namely the calling number identification.
3. The GSM/UMTS HLR (N-102) sends the GSM/UMTS MAP operation "Provide Roaming Number" (S-185) to the IWF (N-300). In accordance to this preferred embodiment said MAP message comprises now the A-Number, namely the calling number identification.
4. The IWF (N-300) sends the IS-41 MAP operation "Routing Request" (S-230) to the IS-41 MSC/VLR (N-203) asking for the routing number. Since the A-Number was already received from the GSM/UMTS Network, the IWF will provide said received A-number towards the IS-41 Network.
5. The MSC/VLR (N-203) returns back to the IWF (N-300) the requested roaming number in the "RoutReq ACK" (S-240) message.

-23-

6. The IWF (N-300) then returns back to the GSM/UMTS HLR (N-102) the requested roaming number in the "PRN ACK" (S-140) message.
7. The GSM/UMTS HLR (N-102) then forward to the GSM/UMTS GMSC (N-101) said roaming number as the requested routing number in the "SRI ACK" (S-150) message.
8. Once the requested data to route the call are returned with the corresponding protocol means to the GSM/UMTS GMSC (N-101), the call is then established. The GSM/UMTS GMSC (N-101) will send the A-Number in an "IAM" message (S-315, S-310) through the ISUP interface to the IS-41 MSC/VLR (N-203). In accordance to this preferred embodiment, said A-number had been previously received at the MSC/VLR (N-203) so that in case said A-number is lost through any transit network, such an A-number kept at said MSC/VLR could always be presented to the destination subscriber. Provided that the called subscriber has the CLIP service provisioned, such an A-number is presented in the terminal (S-260).

20

Another roaming case illustrated in Fig.-7-, assumes an IS-41 subscriber roaming into a GSM/UMTS network. The call and signalling flow in accordance to Fig.-7- is as follows:

- 25 1. An "IAM" message (S-300) is received at the IS-41 GMSC (N-201) from an ISUP or advanced TUP network able to transmit the A-number.
2. The IS-41 GMSC (N-201) sends the IS-41 MAP message "Location Request" (S-220) to the IS-41 HLR (N-202). Said message carries the A-Number.
- 30 3. The IS-41 HLR (N-202) sends the IS-41 MAP message "Routing Request" (S-230) to the IWF (N-300). Said message carries the A-Number received in the previous message.
- 35 4. The IWF (N-300) sends the GSM/UMTS MAP operation

-24-

"Provide Roaming Number" (S-185) to the GSM/UMTS MSC/VLR (N-103) asking for a roaming number. Given that such an A-Number was received from the IS-41 network, in accordance to this preferred embodiment the IWF (N-300) provides said A-number, namely the calling subscriber number identification, towards the GSM/UMTS network in such an appropriate GSM/UMTS MAP message. Also in accordance to this preferred embodiment, said A-number is stored in said GSM/UMTS MSC/VLR per subscriber and per call basis in order to be further retrieved.

5

10

15

20

25

30

35

5. The MSC/VLR (N-103) returns back to the IWF (N-300) the requested roaming number in the "PRN ACK" (S-140) message.
6. The IWF (N-300) then returns back to the HLR (N-202) the requested roaming number in the "RoutReq ACK" (S-240) message.
7. The HLR (N-202) then forwards to the GMSC (N-201) said roaming number as the requested routing number in the "LocReq ACK" (S-250) message.
8. Once the requested data to route the call are returned by the corresponding protocol means to the IS-41 GMSC (N-201), the call is then established. The GMSC (N-201) will send the A-Number in an IAM message (S-315, S-310) through the ISUP interface towards the GSM/UMTS MSC/VLR (N-103). In accordance to this preferred embodiment, said A-number had been previously received at the GSM/UMTS MSC/VLR (N-103), so that in case said A-number is lost through any transit network, such an A-number previously stored at said MSC/VLR (N-103) could always be presented to the destination subscriber. Provided that the called subscriber has the CNIP service provisioned, such an A-number is presented in the terminal (S-160).

A further roaming case illustrated in Fig.-6- assumes

-25-

a GSM/UMTS subscriber roaming into a GSM/UMTS network. The call and signalling flow in accordance to Fig.-6- is as follows:

1. An "IAM" message (S-300) is received at a GSM/UMTS GMSC (N-101) from an ISUP or advanced TUP network able to transmit the A-number.
2. The GSM/UMTS GMSC (N-101) sends the GSM/UMTS MAP message "Send Routing Information" (S-175) to the GSM/UMTS HLR (N-102). In accordance to this preferred embodiment said MAP message comprises now the A-Number, namely the calling number identification.
3. The GSM/UMTS HLR (N-102) sends the GSM/UMTS MAP operation "Provide Roaming Number" (S-185) to the GSM/UMTS MSC/VLR (N-103). In accordance to this preferred embodiment said MAP message comprises now the A-Number, namely the calling number identification. Also in accordance to this preferred embodiment, said A-number is stored in said GSM/UMTS MSC/VLR per subscriber and per call basis in order to be further retrieved.
4. The GSM/UMTS MSC/VLR (N-103) returns back to the GSM/UMTS HLR (N-102) the requested roaming number in the "PRN ACK" (S-140) message.
5. The GSM/UMTS HLR (N-102) then forward to the GSM/UMTS GMSC (N-101) said roaming number as the requested routing number in the "SRI ACK" (S-150) message.
6. Once the requested data to route the call are returned with the corresponding protocol means to the GSM/UMTS GMSC (N-101), the call is then established. The GSM/UMTS GMSC (N-101) will send the A-Number in an "IAM" message (S-315, S-310) through the ISUP interface to the GSM/UMTS MSC/VLR (N-103). In accordance to this preferred embodiment, said A-number had been previously received at the MSC/VLR (N-103) so that in case said A-number is lost through any transit network, such an A-number previously stored at said MSC/VLR could always be

-26-

presented to the destination subscriber. Provided that the called subscriber has the CLIP service provisioned, such an A-number is presented in the terminal (S-160).

5 In accordance with another aspect of the present invention, and in order to make this solution possible, the Calling Subscriber Number Identification, namely the A-number, has to be included into the current GSM/UMTS MAP operations "Send Routing Information" and "Provide Roaming
10 Number". The proposal of a preferred embodiment for this aspect of the present invention is that this data, namely the calling subscriber number identification, should be included as a new specific parameter within said GSM/UMTS MAP operations.

15 In accordance with the message and parameters format specified by 3G TS 29.002, the following new parameter should be included for the existing MAP message "SendRoutingInfo" in said specifications, 3G TS 29.002, as Fig.-9- states:

20 "a-Number" of type "[22] ISDN-AddressString".

Moreover, the following new parameter should be included for the existing MAP message "ProvideRoamingNumber" in said specifications, 3G TS 29.002, as Fig.-10- states:

25 "a-Number" of type "[19] ISDN-AddressString".

These enumerated data should be understood in an illustrative and non-restrictive manner since, as those skilled in the art will appreciate, re-ordering or re-assigning said ordinal assignments will not substantially
30 affect the object of the present invention under this preferred embodiment.

In this respect, still another embodiment of the present invention provides for the inclusion of these new data above within the Extension Container field. Said
35 Extension Container field can be regarded as the means to

-27-

introduce proprietary information in a standard message and thus, provided that the calling subscriber number identification is included there, the result will be a proprietary solution to some extent. This embodiment, 5 unlike the preferred one presented in Fig.-9- and Fig.-10- does not offer comparable standardisation perspectives; however, it is still reasonable means for transmission of said calling subscriber number identification in said GSM/UMTS MAP messages.

10

-28-

CLAIMS

1.- A method for transmission of a calling subscriber number received at a Gateway Mobile Switching Centre (GMSC) [N-101; N-201] of a home Public Land Mobile Network (PLMN) [N-100; N-200] along with an incoming call [S-300] towards a destination subscriber [N-104; N-204] who is roaming subscriber in a visited Public Land Mobile Network [N-100; N-200], said destination subscriber being one of a called subscriber and a forwarded-to subscriber, the method comprising at least one step of interrogating at least one entity selected from GSM network entities [N-102; N-103], UMTS network entities [N-102; N-103] and Inter-Working Functions [N-300] by means of at least one interrogating operation selected from GSM MAP operations, UMTS MAP operations and combinations thereof, in order to retrieve a routing number, and to further reach said roaming subscriber and set up the call;

characterized in that

the step of interrogating at least one of GSM network entities [N-102; N-103], UMTS network entities [N-102; N-103] and Inter-Working Functions [N-300] by means of said interrogating GSM/UMTS MAP operations includes the steps of:

extracting the previously received calling subscriber number identification, to be further sent in an interrogating GSM/UMTS MAP operation, at the interrogating network entity;

including said calling subscriber number identification in the interrogating GSM/UMTS MAP operation [S-175; S-185] at the interrogating network entity;

forwarding said interrogation and said calling subscriber number identification with the interrogating GSM/UMTS MAP operation [S-175; S-185] to said at least one interrogated entity [N-102; N-103; N-300].

35

-29-

2.- A method according to claim 1, wherein an interrogating GSM/UMTS MAP operation for retrieving the routing number as well as to submit the calling subscriber number identification is a MAP operation: "Send Routing Information" [S-175].

3.- A method according to claim 1, wherein an interrogating GSM/UMTS MAP operation for retrieving a routing number as well as to submit the calling subscriber number identification is a MAP operation: "Provide Roaming Number" [S-185].

4.- A method according to any of claims 1, 2 and 3, wherein the home PLMN [N-100] is one of a GSM network and a UMTS network comprising a home GMSC [N-101], and the visited PLMN [N-200] where the home subscriber [N-104] is roaming, is neither a GSM nor a UMTS network.

5.- A method according to claim 4, wherein the home GMSC [N-101] interrogates a GSM/UMTS HLR [N-102] by means of a MAP operation: "Send Routing Information" [S-175] that comprises the calling subscriber number identification data, and wherein the GSM/UMTS HLR [N-102] interrogates an Inter-Working Function [N-300] used in intersystem roaming by means of a MAP operation: "Provide Roaming Number" [S-185] that also comprises the calling subscriber number identification data.

6.- A method according to any of claims 1, 2 and 3, wherein the visited PLMN [N-100] where the home subscriber [N-204] is roaming, is one of a GSM network and a UMTS network, and the home PLMN [N-200] is neither a GSM nor a UMTS network.

7.- A method according to claim 6, wherein an Inter-

-30-

Working Function [N-300] used in intersystem roaming interrogates a visited MSC/VLR [N-103] by means of a MAP operation: "Provide Roaming Number" [N-185] that comprises the calling subscriber number identification data.

5

8.- A method according to any of claims 1, 2 and 3, wherein the home PLMN [N-100] is one of a GSM network and a UMTS network comprising a home GMSC [N-101], and the visited PLMN [N-100] where the home subscriber [N-104] is roaming, is also one of a GSM network and a UMTS network.

10

9.- A method according to claim 8, wherein the home GMSC [N-101] interrogates a GSM/UMTS HLR [N-102] by means of a MAP operation: "Send Routing Information" [N-175] that comprises the calling subscriber number identification data, and wherein the GSM/UMTS HLR [N-102] interrogates the MSC/VLR [N-103] where the subscriber [N-104] is roaming by means of a MAP operation: "Provide Roaming Number" [N-185] that also comprises the calling subscriber number identification data.

15

20

10.- A method according to any of the preceding claims characterized in that said calling subscriber number identification is included as a new parameter of specific type in said MAP operation: "Send Routing Information" [S-175].

25

11.- A method according to any of the preceding claims characterized in that said calling subscriber number identification is included in an Extension Container field of said MAP operation: "Send Routing Information" [S-175] instead of a new parameter of specific type.

30

12.- A method according to any of the preceding claims characterized in that said calling subscriber number

35

-31-

identification is included as a new parameter of specific type in said MAP operation: "Provide Roaming Number" [S-185].

13.- A method according to any of the preceding claims characterized in that said calling subscriber number identification is included in an Extension Container field of said MAP operation: "Provide Roaming Number" [S-185] instead of a new parameter of specific type.

14.- An apparatus for transmission of a calling subscriber number identification received at a home Public Land Mobile Network (PLMN) [N-100; N-200] or at an Inter-Working Function (IWF) [N-300], the apparatus comprising first means for interrogating at least one entity selected from GSM network entities [N-102; N-103], UMTS network entities [N-102; N-103] and Inter-Working Functions [N-300], by means of at least one interrogating operation selected from GSM MAP operations, UMTS MAP operations and combinations thereof, in order to retrieve a routing number, and to further reach a destination subscriber [N-104; N-204] who is a roaming subscribed roaming in a visited Public Land Mobile Network, and set up the call;

characterized in that

the apparatus further comprises:

second means for extracting said calling subscriber number identification from a previously received signalling message and to be further sent in an interrogating operation [S-175; S-185] selected from GSM MAP operations, UMTS MAP operations and combinations thereof; and

third means for including said calling subscriber number identification obtained by said second means, in the interrogating GSM/UMTS MAP operation [S-175; S-185] in order to retrieve a routing number, and to further reach

-32-

such a roaming subscriber and to set up the call, presenting said calling subscriber number identification.

15.- An apparatus according to claim 14, further comprising means for storing on a per subscriber and per call basis, at any of GSM or UMTS entity, said calling subscriber number identification received in an interrogating GSM/UMTS MAP operation, in order to be further delivered to the destination subscriber.

10

16.- An apparatus according to claim 14, wherein said interrogating GSM/UMTS MAP operation is a MAP operation: "Send Routing Information" [S-175], and wherein said MAP operation is designed for including said calling subscriber number identification.

15

17.- An apparatus according to any of claims 14 and 15, wherein said interrogating GSM/UMTS MAP operation is a MAP operation: "Provide Roaming Number" [S-185], and wherein said MAP operation is designed for including said calling subscriber number identification.

20

18.- An apparatus according to any of claims 14 to 17, wherein the home PLMN [N-100] is one of a GSM network and a UMTS network comprising a home GMSC [N-101], and a visited PLMN [N-200] where the home subscriber [N-104] is roaming, is neither a GSM nor a UMTS network;

25

the home GMSC [N-101] interrogates a GSM/UMTS HLR [N-102] by means of a MAP operation: "Send Routing Information" [S-175] that comprises the calling subscriber number identification data; and

30

the GSM/UMTS HLR [N-102] interrogates an Inter-Working Function [N-300] used in inter-system roaming by means of a MAP operation: "Provide Roaming Number" [S-185] that also comprises the calling subscriber number

35

-33-

identification data.

19.- An apparatus according to any of claims 14 to 17,
wherein the visited PLMN [N-100] where the home subscriber
5 [N-204] is roaming, is one of a GSM network and a UMTS
network, and the home PLMN [N-200] is neither a GSM nor a
UMTS network; and

wherein an Inter-Working Function [N-300] used in
intersystem roaming interrogates a visited MSC/VLR [N-103]
10 by means of a MAP operation: "Provide Roaming Number" [S-
185] that comprises the calling subscriber number
identification data.

20.- An apparatus according to any of claims 14 to 17,
15 wherein the home PLMN [N-100] is one of a GSM network and
a UMTS network comprising a home GMSC [N-101], and the
visited PLMN [N-100] where the home subscriber [N-104] is
roaming, is also one of a GSM network and a UMTS network;

the home GMSC [N-101] interrogates a GSM/UMTS HLR [N-
20 102] by means of a MAP operation: "Send Routing
Information" [S-175] that comprises the calling subscriber
number identification data; and

the GSM/UMTS HLR [N-102] interrogates the MSC/VLR [N-
103] where the home subscriber [N-104] is roaming, by
25 means of a MAP operation: "Provide Roaming Number" [S-185]
that also comprises the calling subscriber number
identification data.

21.- An apparatus according to any of claims 14 to 20,
30 wherein said calling subscriber number identification is
included as a new parameter of specific type in said MAP
operation: "Send Routing Information" [S-175].

22.- An apparatus according to any of claims 14 to 20,
35 wherein said calling subscriber number identification is

-34-

included in an Extension Container field of said MAP operation: "Send Routing Information" [S-175]; instead of a new parameter of specific type.

5 23.- An apparatus according to any of claims 14 to 22, wherein said calling subscriber number identification is included as a new parameter of specific type in said MAP operation: "Provide Roaming Number" [S-185].

10 24.- An apparatus according to any of claims 14 to 22, wherein said calling subscriber number identification is included in an Extension Container field of said MAP operation: "Provide Roaming Number" [S-185]; instead of a new parameter of specific type.

15 25.- A method according to any of claims 7 and 9, wherein any of GSM and UMTS MSC/VLR store on a per subscriber and per call basis, the calling subscriber number identification received in a MAP operation: "Provide
20 Roaming Number" [S-185], in order to be further delivered to the destination subscriber.

25

30

35

- 1 -

ABSTRACT

A method and an apparatus for reliable transmission of a calling subscriber number ("A-number") received at a Gateway Mobile Switching Centre (GMSC) [N-101; N-201] of a home Public Land Mobile Network (PLMN) [N-100; N-200] along with an incoming call [S-300] towards a roaming destination subscriber [N-104; N-204] wherein an entity selected from a GSM network entity [N-102; N-103], an UMTS network entity [N-102; N-103] and/or an Inter-Working Functions [N-300] is interrogated by means of a GSM and/or UMTS MAP operation to retrieve a routing number, and to further reach the roaming subscriber and set up the call; wherein the interrogation of the entity includes extracting the previously received A-number identification at the interrogating network entity; including the A-number identification in the interrogating GSM/UMTS MAP operation [S-175; S-185] at the interrogating network entity; forwarding the interrogation and the A-number identification with the interrogating GSM/UMTS MAP operation [S-175; S-185] to the interrogated entity [N-102; N-103; N-300].

1

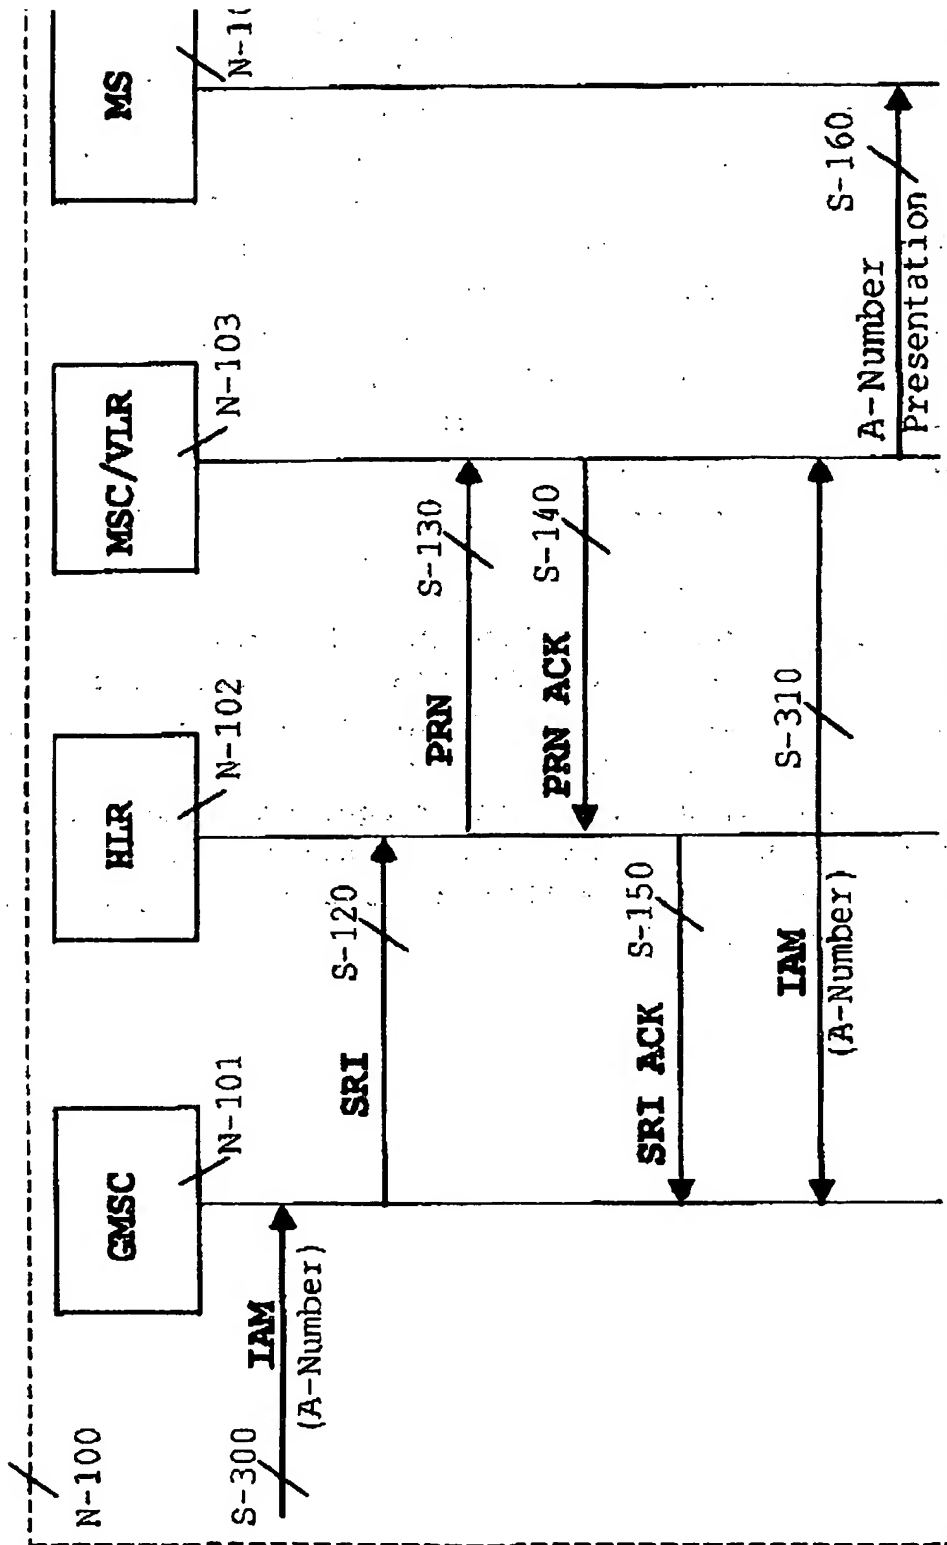


FIG.-1-
Prior Art

2

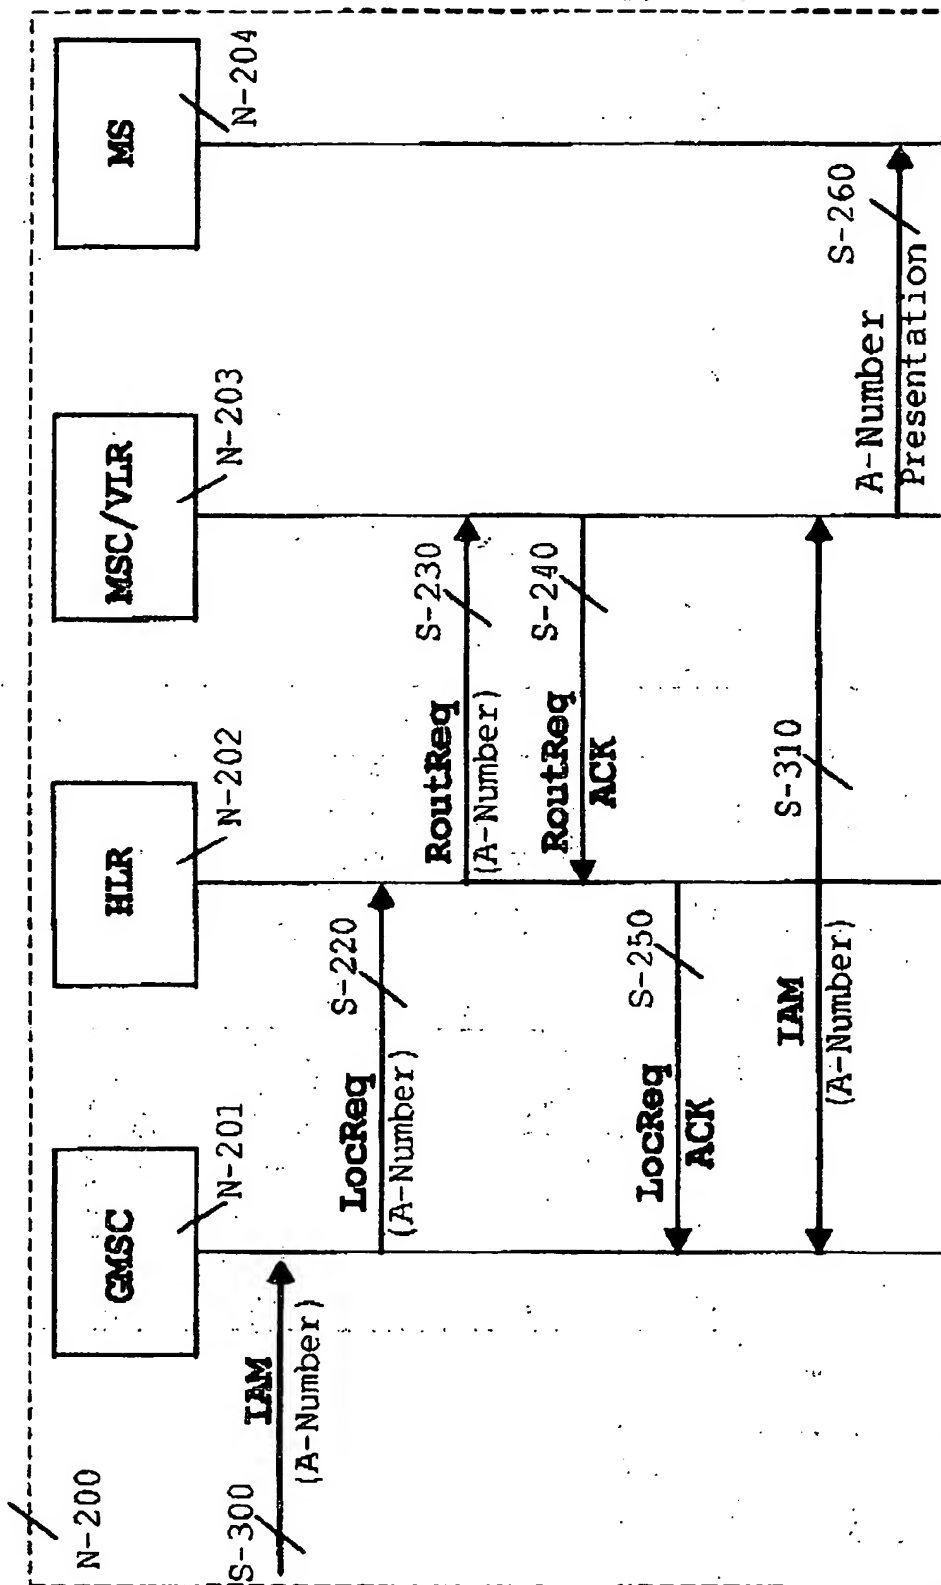


FIG.-2-
Prior Art

3

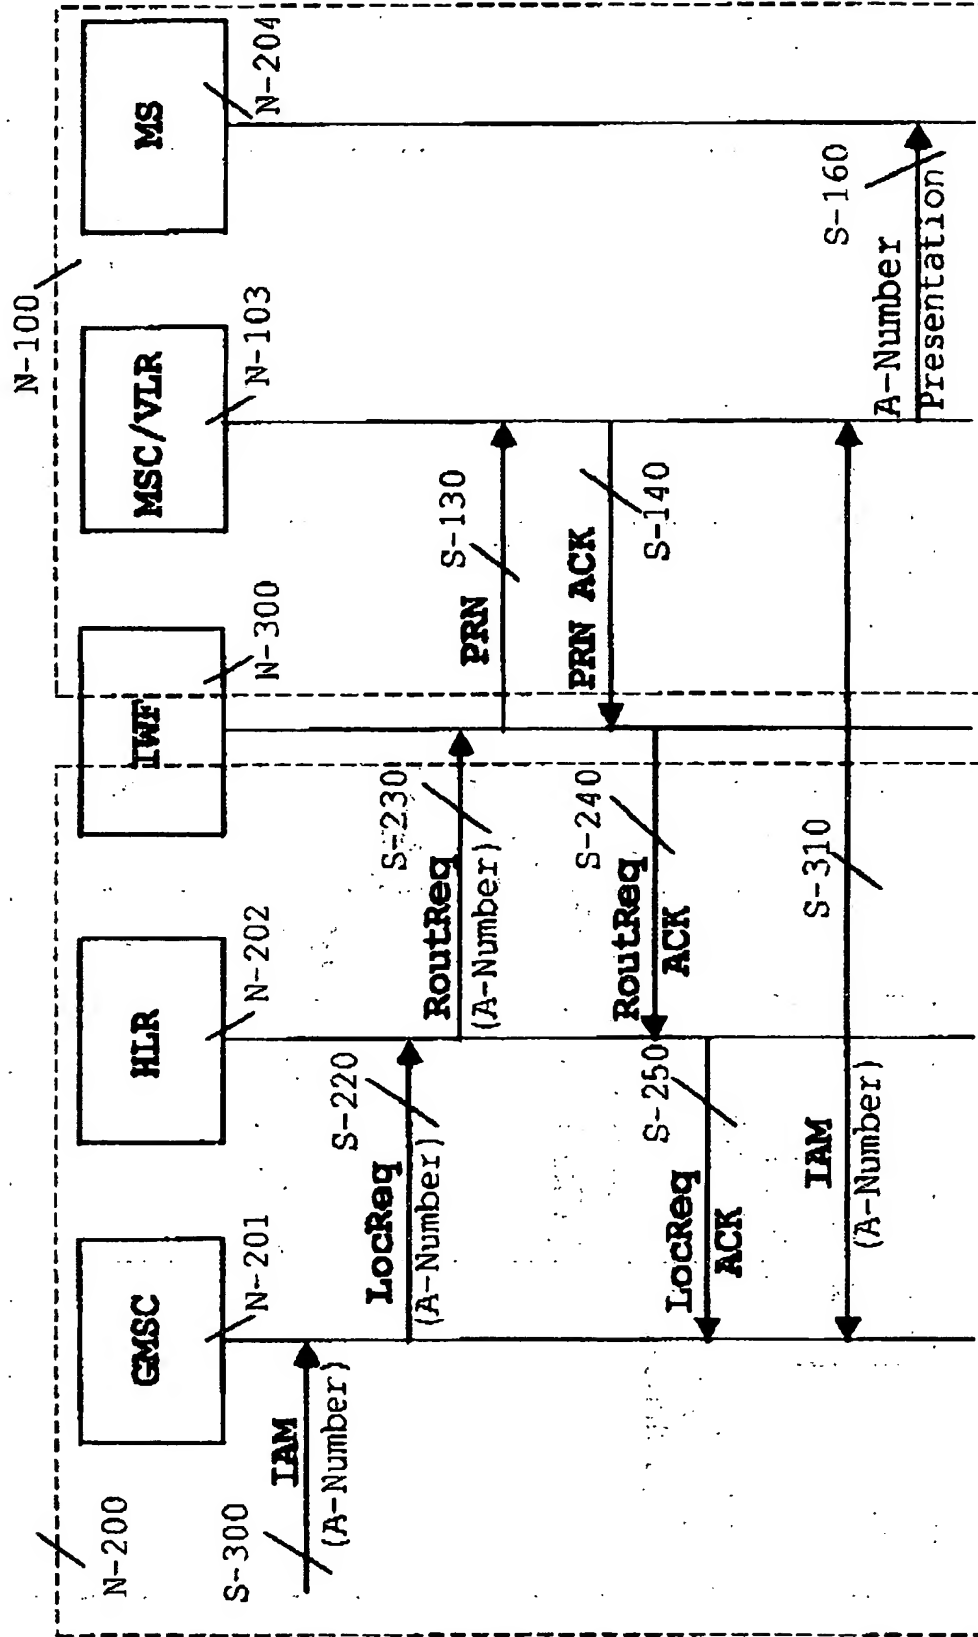


FIG.-3-
Prior Art

4

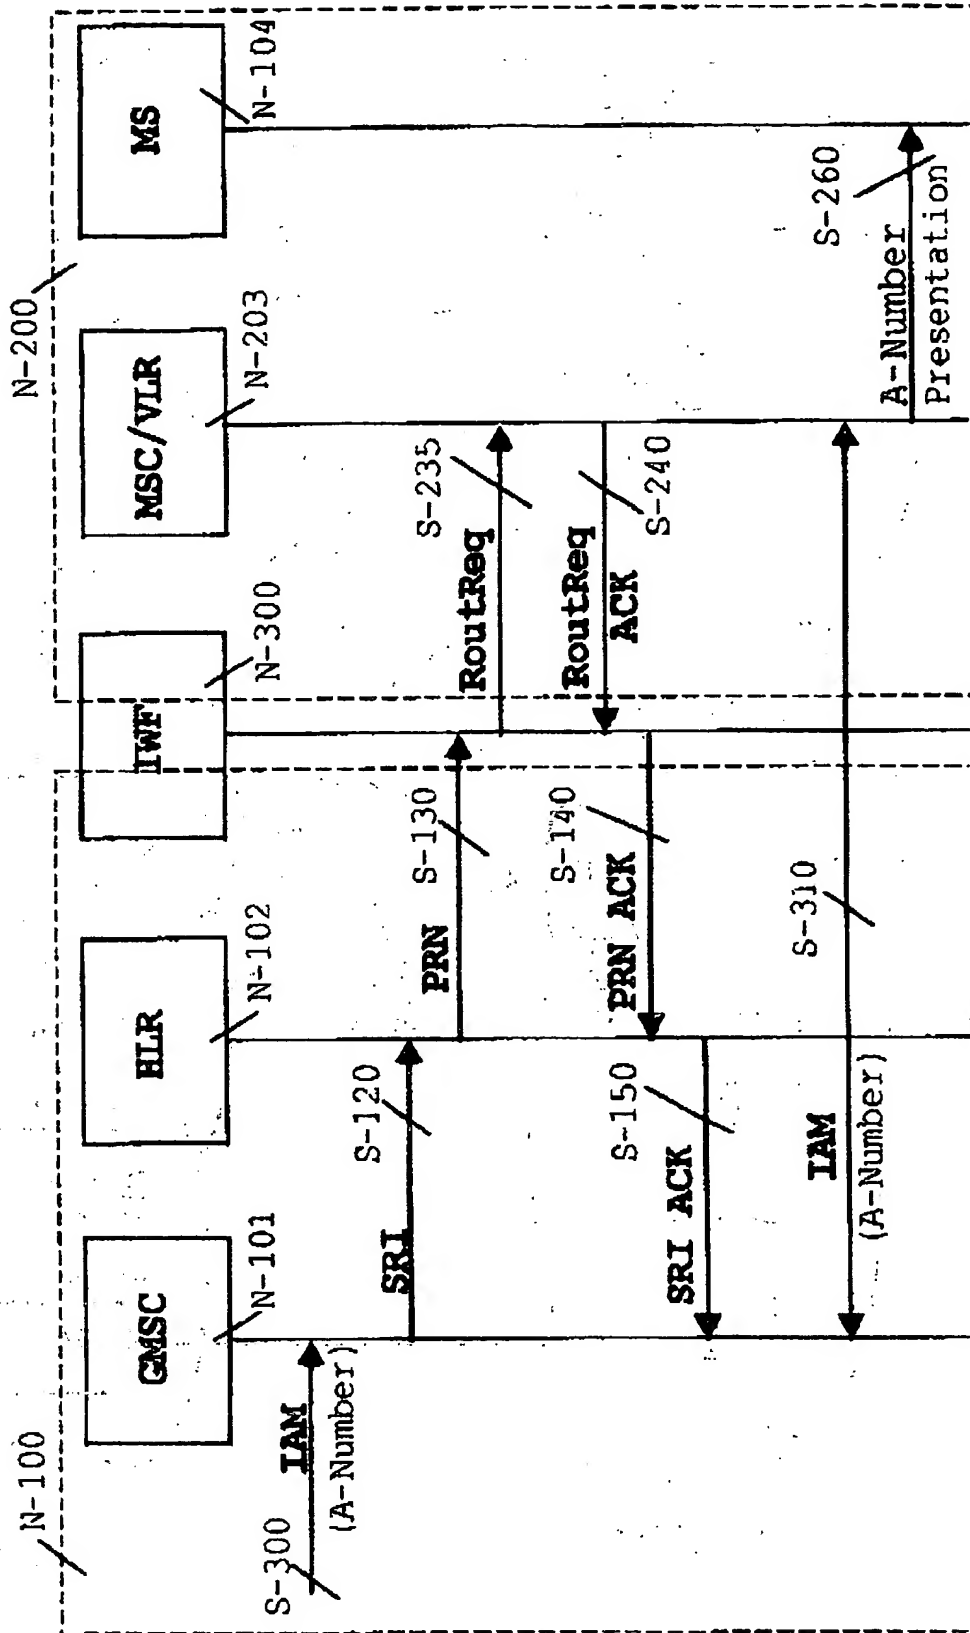


FIG. 4-
Prior Art

5

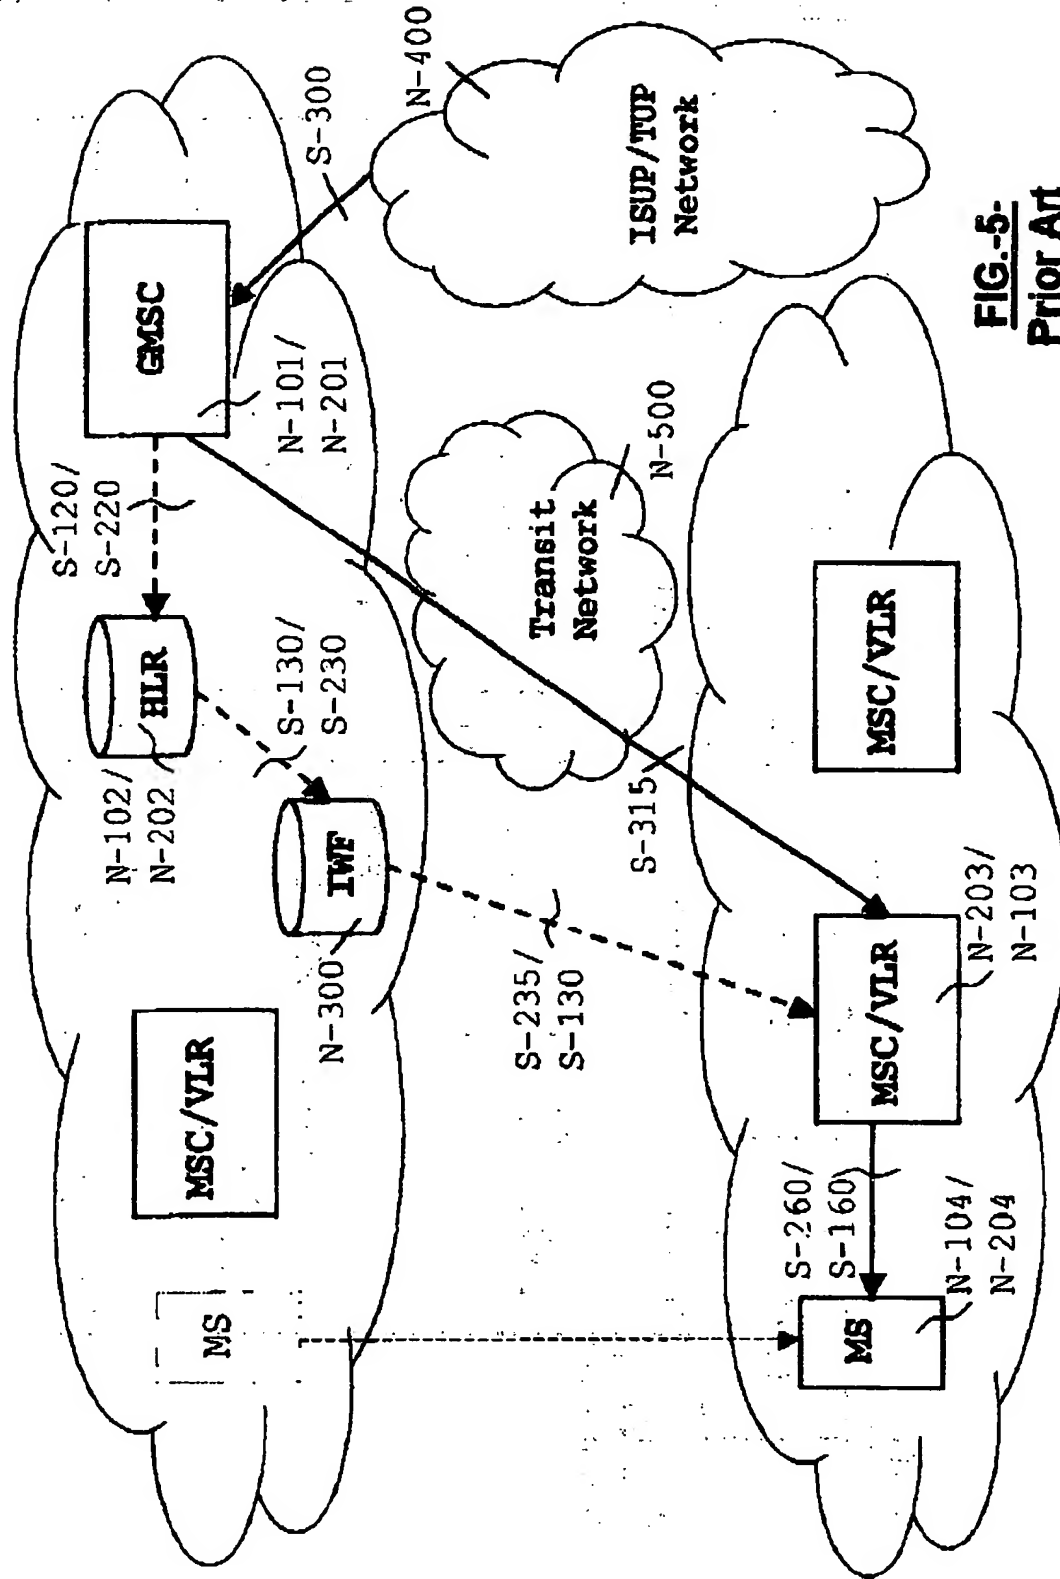


FIG.-5-
Prior Art

6

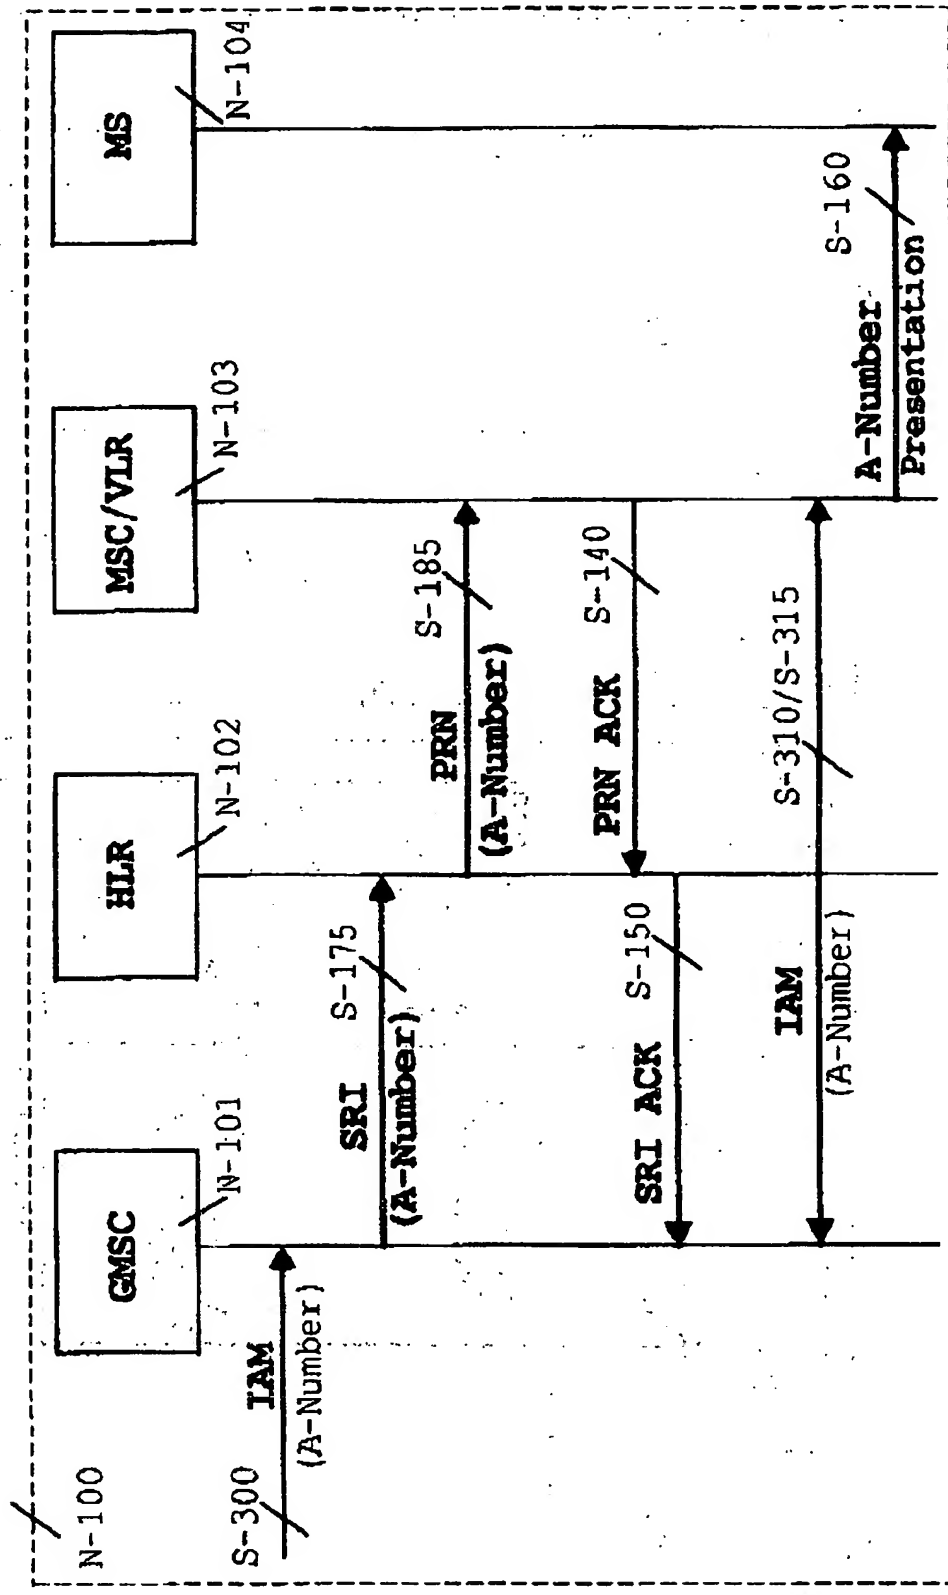


FIG.-6-

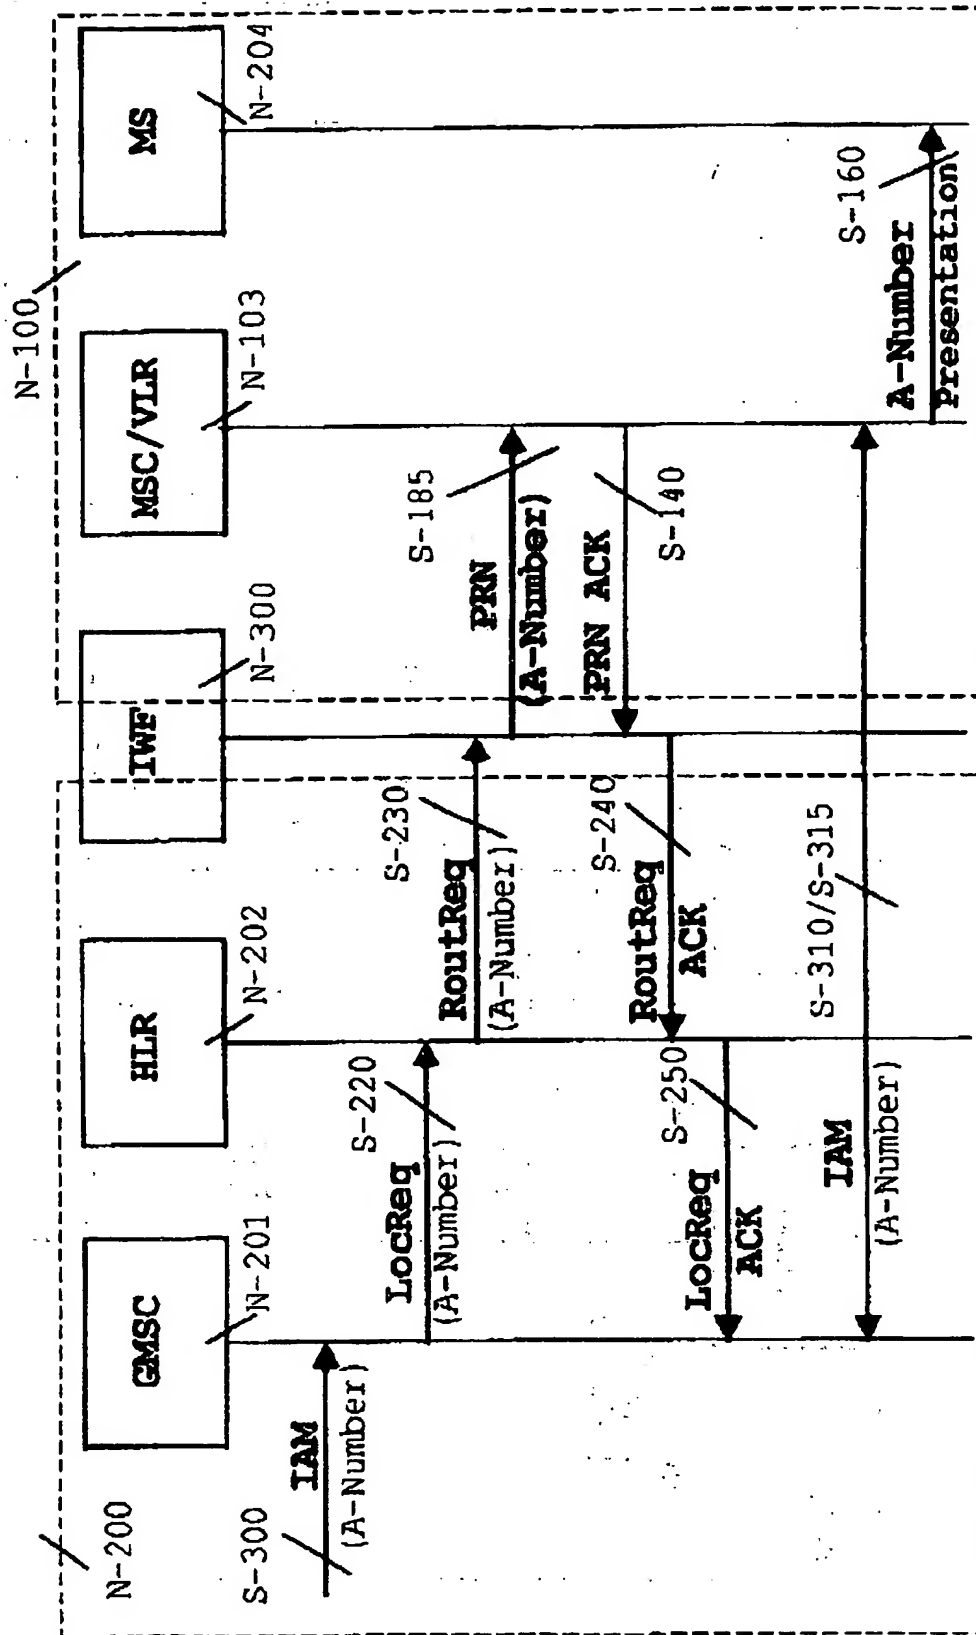


FIG.-7-

8

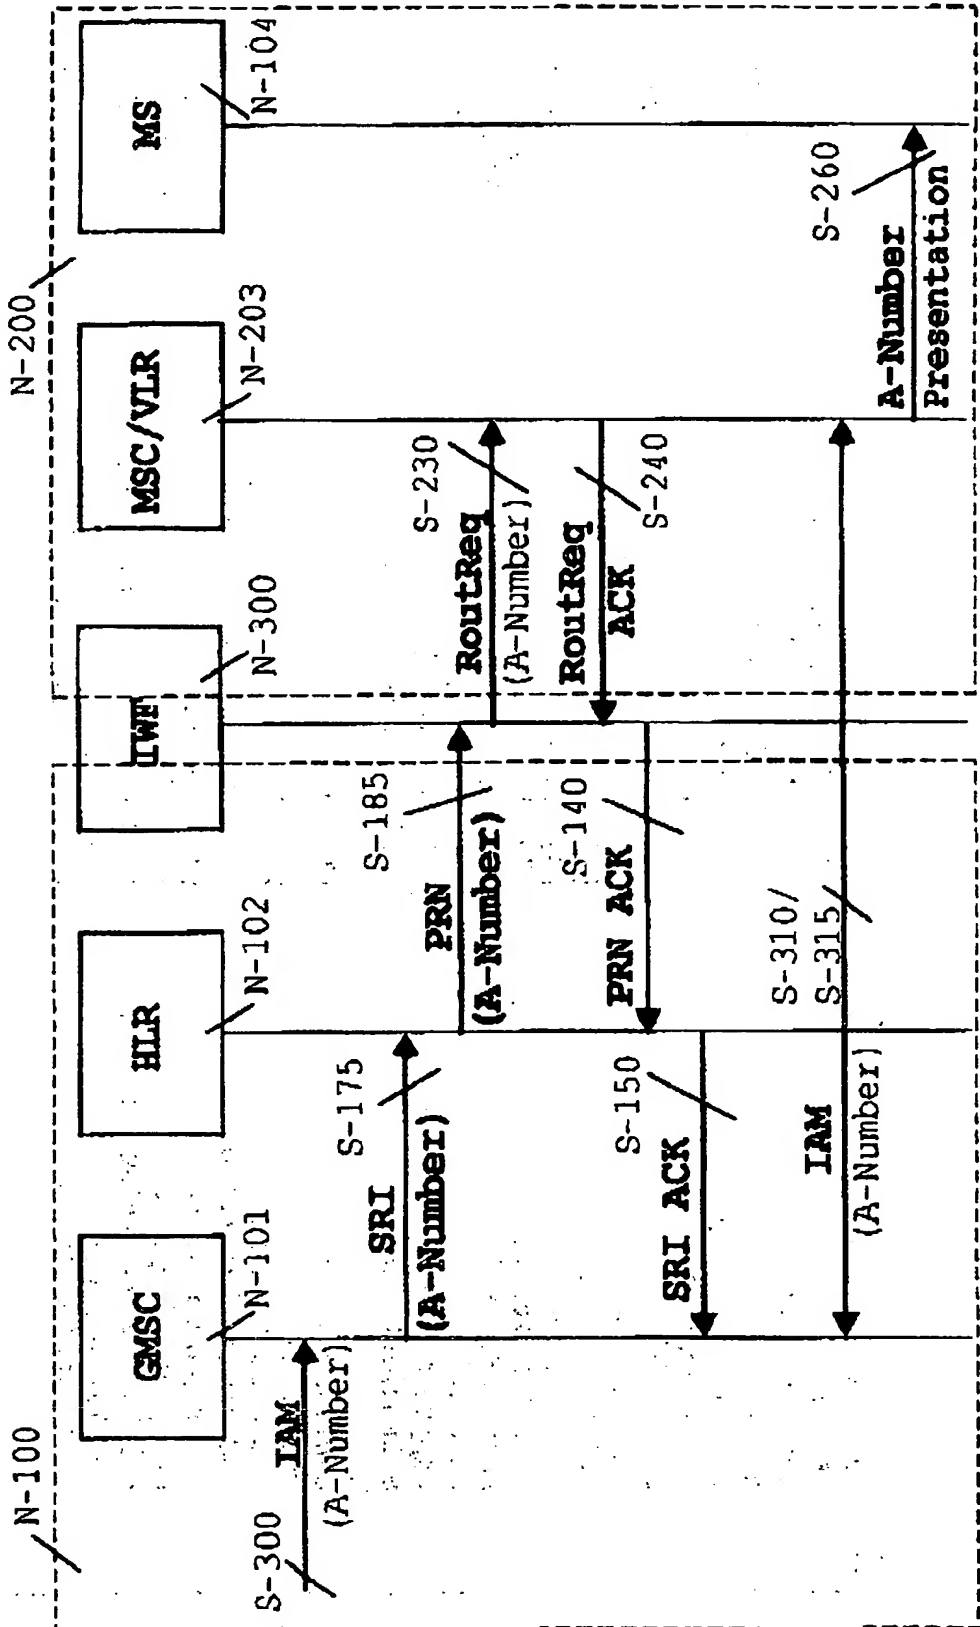


FIG.-8-

SendRoutingInfoArg ::= SEQUENCE {		
msisdn		
cug-CheckInfo	ISDN-AddressString,	OPTIONAL,
numberOfForwarding	CUG-CheckInfo	OPTIONAL,
interrogationType	NumberOfForwarding	
or-Interrogation	InterrogationType,	
or-Capability	NULL	OPTIONAL,
gsmc-Address	OR-Phase	OPTIONAL,
callReferenceNumber	ISDN-AddressString,	
forwardingReason	CallReferenceNumber	OPTIONAL,
basicServiceGroup	ForwardingReason	OPTIONAL,
networkSignalInfo	Ext-BasicServiceCode	OPTIONAL,
camelInfo	ExternalSignalInfo	OPTIONAL,
suppressionOfAnnouncement	CamelInfo	OPTIONAL,
extensionContainer	SuppressionOfAnnouncement	OPTIONAL,
alertingPattern	ExtensionContainer	OPTIONAL,
ccbs-Call		
supportedCCBS-Phase	AlertingPattern	OPTIONAL,
additionalSignalInfo	NULL	OPTIONAL,
istSupportIndicator	SupportedCCBS-Phase	OPTIONAL,
pre-payingSupported	Ext-ExternalSignalInfo	OPTIONAL,
callDiversionTreatmentIndicator	IST-SupportIndicator	OPTIONAL,
longFTN-Supported	NULL	OPTIONAL,
callingSubscriberNumber	CallDiversionTreatmentIndicator	OPTIONAL,
ISDN-AddressString	NULL	OPTIONAL,
}	ISDN-AddressString	OPTIONAL

FIG. 9-

10

```
ProviderRoamingNumberArg ::= SEQUENCE {  
    imsi [0] IMSI, OPTIONAL,  
    msc-Number [1] ISDN-AddressString, OPTIONAL,  
    msisdn [2] ISDN-AddressString, OPTIONAL,  
    lmsi [4] IMSI, OPTIONAL,  
    gsm-BearerCapability [5] ExternalSignalInfo, OPTIONAL,  
    networkSignalInfo [6] ExternalSignalInfo, OPTIONAL,  
    suppressionOfAnnouncement [7] SuppressionOfAnnouncement, OPTIONAL,  
    gsmc-Address [8] ISDN-AddressString, OPTIONAL,  
    callReferenceNumber [9] CallReferenceNumber, OPTIONAL,  
    or-Interrogation [10] NULL, OPTIONAL,  
    extensionContainer [11] ExtensionContainer, OPTIONAL,  
    alertingPattern [12] AlertingPattern, OPTIONAL,  
    ccbs-Call [13] NULL, OPTIONAL,  
    supportedCamelPhasesInGSMSC [15] SupportedCamelPhases, OPTIONAL,  
    additionalSignalInfo [14] Ext-ExternalSignalInfo, OPTIONAL,  
    orNotSupportedInGSMSC [16] NULL, OPTIONAL,  
    pre-payingSupported [17] NULL, OPTIONAL,  
    longFTN-Supported [18] NULL, OPTIONAL,  
    callingSubscriberNumber [19] ISDN-AddressString, OPTIONAL,  
}
```

FIG.-10-

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)